

03-13-00

A

03/09/00
jc715 U.S. PTO

ATTORNEY DOCKET NO.
50-00-002

PATENT APPLICATION

APPLICATION FOR U.S. PATENT UNDER 37 C.F.R. § 1.53(b)
TRANSMITTAL FORM

jc135 U.S. PTO
09/522319
03/09/00

Box Patent Application
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application
of:

Inventor or Application Identifier: Alando M. Ballantyne, et al.

Entitled: METHOD AND SYSTEM FOR MODELING A LEGACY COMPUTER
SYSTEM

Enclosed are: X Specification (43 pages)
 X Drawing(s) (8 Sheets Formal)

 X Signed combined Declaration and Power of Attorney.

 Information Disclosure Statement (IDS) PTO-1449 with copies
of references cited.

 X Certificate of Mailing

 X Return Receipt Postcard

 X An Assignment of the invention to Electronic Data Systems
Corporation is attached. A separate cover sheet in compliance
with 37 C.F.R. § 3.28 and § 3.31 is included with authorization
for charging a deposit account for an Assignment recordal fee of
\$40.00 pursuant to 37 C.F.R. § 1.21(h).

 The accompanying application claims the benefit of U.S.
provisional patent application Serial No. _____ filed _____.

09/522319

Attorney's Docket:
50-00-002
Page 2

PATENT APPLICATION

Applicant is Large Entity.

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee
					\$ 690.00
Total Claims:	15	- 20 =	0	X \$18 =	\$ 0.00
Independent Claims	3	- 3 =	0	X \$78 =	\$ 0.00
TOTAL FILING FEE =					\$ 690.00

Please charge the filing fee of \$690.00 or any other fee required or credit any overpayment to Deposit Account No. 05-0765 of ELECTRONIC DATA SYSTEMS CORPORATION. **A duplicate copy of this sheet is enclosed.**

Respectfully submitted,

BAKER BOTTS L.L.P.
Attorneys for Applicants



Robert W. Holland
Reg. No. 40,020

Date: March 9, 2000

Correspondence Address:
L. Joy Griebenow
Electronic Data Systems Corporation
5400 Legacy Drive, MS H3-3A-05
Plano, Texas 75024
Tel. (972) 605-5500
Fax. (972) 605-5609

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE


In re Application of: Alando M. Ballantyne, et al.
Date Filed: March 9, 2000
Title: METHOD AND SYSTEM FOR MODELING A
LEGACY COMPUTER SYSTEM

Box Patent Application
Honorable Assistant Commissioner
of Patents
Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Transmittal, Patent Application, Declaration and Power of Attorney, Assignment, PTO-1595 Assignment Recordation Cover Sheet and Formal Drawings are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on this 9th day of March, 2000, and is addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231.



Matthew Beeter

Express Mail Receipt
No. EL519494258US
Attorney's Docket:
50-00-002

METHOD AND SYSTEM FOR MODELING A LEGACY COMPUTER SYSTEM

TECHNICAL FIELD

This invention relates in general to the field of computer systems, and more particularly a method and system for reporting XML data from a computer system.

5

CROSS REFERENCE TO RELATED APPLICATIONS

This application relates to U. S. Patent Application Serial Number _____, entitled METHOD AND SYSTEM FOR APPLYING XML SCHEMA, by Ballantyne, et al., filed concurrently with this application.

10

This application relates to U. S. Patent Application Serial Number _____, entitled METHOD AND SYSTEM FOR REPORTING XML DATA FROM A LEGACY COMPUTER SYSTEM, by Ballantyne, et al., filed concurrently with this application.

15

BACKGROUND OF THE INVENTION

The Internet and e-commerce are rapidly reshaping the way that the world does business. In addition to direct purchases made through the Internet, consumers increasingly depend upon information available through the Internet to make purchasing decisions. Businesses have responded by allowing greater access of information

20

through the Internet both directly to consumers and to other businesses such as suppliers. One result of the increased access to electronic information through the Internet is a decreased dependency and desire for printed
5 "hard copy" information.

Extensible Mark-up Language ("XML") provides an excellent tool for business-to-business electronic commerce and publication of data via the Internet. XML specifies a format that is easily adapted for data
10 transmission over the Internet, direct transfer as an object between different applications, or the direct display and manipulation of data via browser technology. Currently, complex transformations are performed on data output in legacy computer system formats in order to put
15 the data in XML format.

One example of the transformation from written reports typically output by legacy computer systems to electronic reports is the telephone bill. Historically, telephone companies have relied on mainframe or legacy
20 computer systems running COBOL code to track and report telephone call billing information. Typically, these legacy computer system reports are printed, copied and distributed to those who need the information. However, conventional legacy computer system report formats are
25 difficult to transmit or manipulate electronically. Yet, the electronic distribution of bills, such as through e-mail, a biller's web site or at a bill consolidator chosen by the consumer, enhances flexibility and control of bill payment, especially with complex business
30 invoices.

Generally, in order to make conventional legacy reports available in different formats, a complex transformation of the data is performed based on a report print stream. One transformation technique is to write a "wrapper" around the legacy computer system. The wrapper includes parsers and generators that transform legacy computer system reports into XML formatted output. Parsers apply a variety of rules to identify and tag data output in a legacy report. For example, a parser might determine that a data field of a telephone bill represents a dollar amount based on the presence of a dollar sign or the location of a decimal point in the data field, or that a data field represents a customer name due to absence of numbers. Once the parser deciphers the legacy report, a generator transforms the legacy computer system data into appropriately tagged XML format.

Although the end result of the parsing and transforming process is data in an XML format, the process itself is difficult and expensive to implement and cumbersome to maintain. Without careful study of underlying program logic, it is generally not possible to reliably determine all potential outputs from the legacy computer system. In particular, even a fairly large output sample is almost certain to be incomplete in that some program logic is only rarely exercised. Another difficulty with the parsing and transforming process is that, as changes are made to the underlying program applications of the legacy computer system, the parsing and transforming systems generally require updates that mirror the underlying changes. These downstream changes

increase the time and expense associated with maintaining the legacy computer system, and also increase the likelihood of errors being introduced into the XML formatted output.

5 Another difficulty associated with the use of XML is that, although XML dramatically improves the utility of output data, the generation of XML output depends upon underlying programs that adhere to an exacting data structure. For instance, the generation of syntactically
10 correct XML requires adherence to a rigid labeled tree structure so that output data is identified by "tags" and "end tags" associated with the XML data structure as defined by an XML schema. When writing a deeply embedded element of an XML tree, such as a subschema within a
15 defined XML schema, tags corresponding to all of that element's ancestor elements must also be written. When writing another element, not part of a current XML subschema, the current subschema must be closed off to an appropriate level with balancing closing end tags for the
20 ancestor elements. XML schema also specify type and cardinality constraints on their elements. Thus, substantial and exacting bookkeeping of programs that output XML is necessary with respect to the XML schema in order to minimize errors on the part of programmers.

25

SUMMARY OF THE INVENTION

Therefore, a need has arisen for a method and system which rapidly and automatically modifies legacy computer systems to produce output in an XML format.

30 A further need exists for a method and system which modifies legacy computer systems to produce output in XML

format without altering the underlying legacy computer system program logic or business rules.

A further need exists for a method and system which determines write operations of a legacy computer system to allow modification of those nodes so that the legacy computer system outputs data in XML format.

A further need exists for a method and system which generates syntactically correct XML output with automated bookkeeping to minimize programming errors.

10 In accordance with the present invention, a method and system is provided that substantially eliminates or reduces disadvantages and problems associated with previously developed methods and systems that transform the output from legacy computer systems into an XML
15 format. The present invention provides XML output by modifying the underlying legacy computer system program applications to report data in XML format instead of transforming the output from the legacy computer system after the data is reported in the format of the legacy
20 computer system.

More specifically, a code generation engine automatically modifies legacy computer system program applications to create modified legacy program applications. The modified legacy program applications
25 are run on the legacy computer system so that the data output from the legacy computer system is in XML format. The modified legacy program applications are written in the computer language of the legacy computer system so that the legacy computer system directly produces an XML
30 version of its output without the need to alter the logic

or business rules embodied in the unmodified program applications of the legacy computer system.

The code generation engine creates the modified program applications in accordance with a modification specification created by a mapping engine. The mapping engine generates the modification specification and context table by mapping a model of write operations of the legacy computer system to an XML schema. The mapping engine provides the modification specification to the code generation engine. The code generation engine creates modified legacy computer system program applications for use on the legacy computer system. A writer engine is an application program loaded on the legacy computer system and written in the language of the legacy computer system. The writer engine is called by the modified program applications to write XML output in the format of the XML schema encoded by the context table.

The model used by the mapping engine is generated by a modeling engine which analyzes the legacy computer system to identify and model the write operations, such as with a report data model. The modeling engine determines a list of legacy computer system program applications that report data. The program applications that report data are further analyzed to determine the incidents within each program application at which a write operation exists. A report data model is then compiled with a value and/or type for the data fields of each incident. The report data model is augmented by a formal grammar that simplifies the process of relating

write operations to execution paths of legacy computer system program applications.

Once the modified program application is loaded on the legacy computer system, the legacy computer system continues to perform its functional operations without change to the underlying business or program logic. When a legacy computer system program application commands the reporting of data, modified instructions provided in the modified program application call the writer engine to output syntactically correct XML data. The writer engine determines the current context of XML output and opens appropriate schema element data structures in conjunction with the context table. The writer engine then analyzes the current schema element data structure and the called schema element to determine the relationship of the called schema element with the current schema element. If the called schema element is a descendant of the current schema element, the writer engine opens the schema element ID tags down through the called schema element and outputs the data from the schema element in syntactically correct XML format. If the schema element is not a descendant of the current schema element, the writer engine finds a mutual ancestor having consistent cardinality, closes the schema element ID tags up to the ancestor schema element and proceeds to open the schema element ID tags down through the called schema element to output data in syntactically correct XML format. In addition, the writer engine supports delayed printing of tags and attributes until such time as a complete syntactic unit is available.

The present invention provides a number of important technical advantages. One important technical advantage is the ability to rapidly and automatically modify legacy computer system program applications to enable them to
5 directly produce an XML version of their data output. By modifying the underlying legacy computer system program applications, XML output is made available directly from the legacy computer system without a transformation of the data itself from a legacy computer system format.
10 Further, the underlying program logic and business rules remain unaltered so that the substantive functions of the legacy computer system need not change. Thus, a business enterprise using a legacy computer system is provided with the greater accessibility to data provided by output
15 in XML format without affecting computed values.

Another important technical advantage of the present invention is that modification of the underlying legacy computer program applications is operationally less expensive, complex and time-consuming than transformation
20 of legacy computer system output to an XML format. For instance, once modified program applications are running on the legacy computer system, XML formatted output is available without further action to the data. By comparison, transformation of output to an XML format
25 after the data is reported by the legacy computer system requires action with each data report. Thus, if any changes are made to the underlying legacy program applications, changes must also generally be made to transformation applications that mirror the underlying
30 changes. This further complicates the maintenance of the legacy computer system.

Another important technical advantage of the present invention is that, whether or not used with a legacy computer system, the writer engine and context table aid in the generation of syntactically correct XML output.

5 For instance, the writer engine ensures that a command to write an embedded XML element will include tags corresponding to all of the embedded element's ancestor elements. Also, when an XML element is written that is not part of the current XML subschema, the writer engine
10 will close off the current XML subschema to an appropriate level of an ancestor schema element. Automation of the bookkeeping involved with the XML schema eliminates the risk of syntactic errors associated with XML reports. The delayed printing feature provides
15 a mechanism whereby a program can generate correct XML data even when the sequence of print commands in the original legacy system application program does not map directly onto the order of XML elements prescribed by the XML schema.

20 Another important advantage of the present invention is that tool support manages the complexity of modeling the underlying program logic, resulting in substantially reduced time and expense for modification of a legacy computer system to output XML formatted data. Tools aid
25 in: the determination of the control flow graph of legacy applications; the abstraction out of this graph of a subgraph specifically related to the writing of report lines; the identification of constants and data items that flow into print lines so that the elements that need
30 to be written as tagged XML can be readily identified; and the identification of domain specific information

such as locations of headers and footers. Automation through tool support greatly enhances management of program complexity.

5 BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present invention and advantages thereof may be acquired by referring to the following description taken in conjunction with the accompanying drawings, in which like reference numbers indicate like features, and wherein:

Figure 1 depicts a block diagram of a code generation system in communication with a legacy computer system;

Figure 2 depicts a flow diagram of the generation of modified legacy program applications to output XML data;

Figure 3 depicts a flow diagram of the generation of a model of the write operations of a legacy program application;

Figure 4 depicts a sample output of a legacy computer system report for a telephone bill;

Figure 5 depicts XML formatted data corresponding to the legacy computer system report depicted by Figure 4;

Figure 5A depicts an XML schema for the output depicted in Figure 5;

Figure 6 depicts a graphical user interface for mapping legacy computer system code to an Extensible Markup Language schema and report data model;

Figure 6A depicts underlying COBOL code modeled by the report data model of Figure 6;

Figure 7 depicts a sample Extensible Markup Language schema for outputting address data;

Figure 7A depicts a tree structure for the schema of Figure 7;

Figure 7B depicts a computed data context table for the schema depicted by Figure 7; and

- 5 Figure 8 depicts a flow diagram of an XML print operation that ensures generation of syntactically correct Extensible Markup Language data output.

DETAILED DESCRIPTION OF THE INVENTION

- 10 Preferred embodiments of the present invention are illustrated in the figures, like numeral being used to refer to like and corresponding parts of the various drawings.

- 15 In order to take advantage of the opportunities provided by the use of XML as a medium for e-commerce, businesses will eventually have to either replace existing legacy computer systems or re-write the applications on the legacy computer systems. However, businesses have substantial investments in their existing
- 20 legacy computer systems and related applications so that wholesale replacement of these systems and applications is not practical in the short term. Legacy computer systems perform essential functions such as billing, inventory control, and scheduling that need massive on-
- 25 line and batch transaction processing. Legacy computer system applications written in languages such as COBOL remain a vital part of the enterprise applications of many large organizations for the foreseeable future. In fact, this installed base of existing software represents
- 30 the principal embodiment of many organizations' business rules. Although, in principle, these applications could

be hand-modified to output data in XML format, in reality the underlying logic of even a simple report application can be difficult to understand and decipher.

Therefore, a tremendous challenge facing many businesses is the rapid and inexpensive adaptation of existing computer systems to take advantage of the opportunities presented by electronic commerce. Even when installing new and updated computer systems, the ever-evolving nature of electronic commerce demands that businesses incorporate flexibility as a key component for new computer systems. XML has become a popular choice for reporting data due to the ease with which XML adapts to essential e-commerce functions, such as transmission over the Internet, direct transfer as an object between different applications and display and manipulation via browser technology. XML's flexibility results from its inclusion of named tags bracketing data that identify the data's relationship within an XML schema. However, implementation of XML data reports relies on accurate use of tags to define the output data within the XML schema. Thus, computer systems that implement XML adhere to the XML schema and use exact bookkeeping to obtain accurate reports.

The present invention aids in the implementation of XML for reports, both by the modification of legacy computer system program applications to output XML data and by the tracking of XML output within an XML schema to ensure an accurate output, whether or not the XML data originates with a legacy computer system. Referring now to Figure 1, a block diagram depicts a computer system 10 that modifies a legacy computer system 12 to output data

in XML format. A code generation system 14 interfaces with legacy computer system 12 to allow the analysis of one or more legacy program applications 16 and the generation of one or more modified legacy program applications 18. Code generation system 14 also provides a writer engine 20 and context table 22 to legacy computer system 12. Legacy computer system 12 is then able to directly output XML formatted data when modified legacy program applications 18 call writer engine 20 in cooperation with context table 22 to output syntactically correct XML data.

Code generation system 14 includes a code generation engine 24, a mapping engine 26 and a modeling engine 28. Modeling engine 28 interfaces with legacy computer system 12 to obtain a copy of legacy program applications 16 for automated review and modeling. Modeling engine 28 generates a list of incidents for points in the program at which data is written. For instance, modeling engine 28 may search the source code of the legacy program applications for reporting or writing commands for selected output streams. The list of report incidents are used to model the report functions of the legacy computer system such as by a report data model that lists the values and types of written data fields from the legacy program applications 16. The list of report incidents is then augmented by a formal grammar that is used to relate the XML schema to the output reported by the legacy program applications. The list of report incidents and the formal grammar are two components of the report data model for the legacy system application program. Intuitively, an incident describes a line in a

report, and the formal grammar describes how the application program sequences those lines to form a report.

Modeling engine 28 provides the report data model
5 identifying report incidents in the legacy program applications 16 to mapping engine 26 and modeling/mapping graphical user interface 30. Mapping engine 26 maps the report incidents from the report data model to the XML schema 32 and this relationship between the report data
10 model and XML schema 32 is displayed on modeling/mapping graphical user interface 30. By establishing the relationship between the report incidents of legacy program application 16 and the XML schema 32, mapping engine 26 defines a specification for modification of the
15 legacy program applications 16 to output XML data. Modeling/mapping graphical user interface 30 provides information to programmers of the modification specification. Modeling/mapping graphical user interface 30 produces a modification specification and a context
20 table 22. Optionally, the modeling/mapping graphical user interface 30 allows programmers to create or modify an XML schema.

Code generation engine 24 accepts the modification specification, a copy of the legacy program applications
25 16, and context table 22 to generate modified legacy program applications 18. Based on the modification specification, code generation engine 24 generates source code in the computer language of the legacy computer system that is inserted in legacy program applications 16
30 to command output of XML data and saves the modified source code as modified legacy program applications 18.

The modified legacy program applications 18 may continue to maintain the legacy computer system report instructions so that the modified program applications 18 continue to report data in the legacy computer system format in addition to the XML format. The outputting of both formats aids in quality control by allowing a direct comparison of data from modified and unmodified code. Alternatively, the modified instructions provided by code generation engine 24 may replace report instructions of legacy program applications 16 so that modified legacy program applications 18 report data exclusively in XML format. Writer engine 20 is written in a computer language of legacy computer system 12 and references context table 22 to determine the appropriate XML schema elements for output of data from legacy system 12. The modified code in modified legacy program applications 18 calls writer engine 20 when outputting data in XML format.

Referring now to Figure 2, a simplified flow diagram depicts the process of generation of modified legacy program applications that output data in XML format. The process begins at step 34 in which the legacy code of the legacy program applications 16 is made available to code generation system 14. For example, a mainframe legacy computer system running COBOL source code downloads a copy of the source code to code generation system 14 for analysis and generation of modified code.

At step 36, code generation system 14 models the legacy program applications to provide a report data model of the write incidents and their underlying grammar from the legacy program applications' code. For

instance, a report data model identifies the incidents within the code of legacy program applications 16 at which data to selected output devices are written, including the values and types of the data. At step 38, 5 the report data model is used to generate a modification specification. The modification specification is generated in conjunction with an XML schema provided at step 40 that defines the data structure for write instructions of the modified legacy program applications 10 18 to output XML data.

At step 42, the modification specification is used to automatically generate modified legacy code to be run on the legacy computer system 12. The modified legacy code is run at step 44 so that the modified legacy 15 program applications emit output from legacy system 12 in XML format without requiring further transformation of the output data.

The process of modeling legacy computer system 12 is shown in greater detail by reference to Figure 3. 20 Modeling engine 28 extracts a report data model of legacy program applications 16 through an automated analysis of the underlying legacy code. The automated analysis provides improved understanding of the operation of the legacy code and reduces the likelihood of errors 25 regarding the operation and maintenance of the underlying legacy code. Essentially, modeling engine 28 parses the legacy software process into rules to graph its control flow. An abstraction of the control flow produces a report data model that allows understanding of data types 30 and invariant data values written at each write instruction in the report data model. The report data

model, when combined with the values and typing of written data fields, provides a model of legacy program applications 16.

Referring to Figure 3, the modeling process starts
5 at step 46 through a determination of the legacy
programs' control flow graph. The control flow graph of
a particular legacy program application is a directed
graph (N, A) in which N contains a node for each
execution point of the program application and A contains
10 an arc $\langle n_1, n_2 \rangle$, where n_1 and n_2 are elements of N , if the
legacy program application is able to move immediately
from n_1 to n_2 for some possible execution state.

At step 48, the write operations of the control flow
graph are determined to obtain a data file control graph.
15 Essentially, the control flow graph is abstracted to
contain only start nodes, stop nodes, and nodes writing
to selected data files. This results in a data file
control graph that identifies the write incidents in the
legacy program applications. The data file control graph
20 abstracted from a control flow graph (N, A) is a directed
graph (N_R, A_R) . A node n is in the set of nodes N_R if the
node n starts a legacy program application, stops a
legacy program application or writes to a data file. The
arc $\langle n_1, n_m \rangle$ is in A_R if both n_1 and n_m are in the set of
25 nodes N_R and a sequence of arcs $\langle n_1, n_2 \rangle, \langle n_2, n_3 \rangle, \dots$
 $\langle n_{m-1}, n_m \rangle$ exists in A where, for i from 2 to $m-1$, n_i is
not in the set of nodes N_R .

Once the data file control graph is completed, at
step 50, information about the data written at each data
30 file write node is attached to the data file control
graph. For instance, the values or the type of each data

field written by each node are statically determined via data flow in the control flow graph and are attached to the nodes of the data file control graph.

At step 52, the paths from the start nodes through
5 the data file control graph to the stop nodes are represented in a formal grammar. This formal grammar with the attached data field information form the report data model. This model is an abstract representation of the data files that can be written by the legacy program
10 applications and provides the basis on which a modification specification can be written.

The report data model is presented in two parts. First, each write node with its attached data field information is presented as an incident. These incidents
15 are the most basic or leaf sub-expressions of the report data model. Second, the non-leaf sub-expressions of the report data model are presented as rules hierarchically building up from the incidents.

The generation and presentation of a report data
20 model of legacy program applications may be illustrated by consideration of a telephone bill example. Figure 4 depicts the printed output from a COBOL program for a telephone bill. A typical COBOL program prints the telephone bill in a predetermined format that may
25 include, for example, predetermined paper sizes and column dimensions. The printing of the "TOTAL CALLS" line in Figure 4 is the result of a computation of the total number of calls, total time of the calls and the total cost of the calls. As an example of a single node
30 of a control flow graph, the incident derived from COBOL

code for outputting the total calls line of Figure 4 is as follows:

```

Incident 47 loc 414 record PRTEC from RS-LINE
      <LINE 2>
5      0:  "  TOTAL CALLS:"
      14:  RECORDS-SELECTED-EDIT loc 266 pic Z,ZZ9 size 5
      19:  "                      TOTAL TIME:  "
      53:  RS-HH loc 270 pic 99 size 2
      55:  ":"
10     56:  RS-MM loc 272 pic 99 size 2
      58:  ":"
      59:  RS-SS loc 274 pic 99 size 2
      61:  "  "
      63:  RS-COST loc 276 pic $$$$$.99 size 8
15     71:  "  "

```

Incident 47 describes the data written at the appropriate point in the program by the write instruction at line 414. The data include the headings of "TOTAL
20 CALLS" and "TOTAL TIME" followed by the accumulated values for the total number of calls, the total time of calls and the total cost of calls. The constant values "TOTAL CALLS" and "TOTAL TIME" are determined by data flow analysis of the legacy application program.

25 The report data model includes grammar rules built up from the write incidents. Once each grammar rule is defined from the appropriate incidents and sub-rules, a report grammar describing the potential output of the legacy program applications for the bill shown in Figure
30 4 is generated as follows:

Rule 23 [seq 3 4 5 6 7 8 9 10]
 Rule 24 [? 23]
 Rule 41 [seq 23 24 25]
 Rule 42 [?41]
 5 Rule 45 [seq 0 1 2 42]
 Rule 46 [? 45]
 Rule 50 [seq 24 49]
 Rule 51 [?50]
 10 Rule 61 [seq 24 47 48 51 23]
 Rule 62 [? 61]
 Rule 63 [seq 62 24 25]
 Rule 64 [*63]
 Rule 78 [seq 46 64 24 47 48 50 65 66]
 Root 79 [seq 78]

15

These grammar rules show how the write incidents are combined to represent the output written by the legacy application program. For example, rule 61 consists of the sequence of sub-rules and incidents 24, 47, 48, 51, and 23. Data described by each sub-rule or incident is followed sequentially in the data file by the data described by the next sub-rule or incident. That is, in rule 61, data described by incident 47 is followed immediately by data described by incident 48. Rule 62 is a conditional rule indicating that data described by 61 may be written to the data file or skipped entirely. Rule 64 is a repeating rule indicating that there is data described by rule 63 that is repeated zero or more times.

Referring now to Figure 5, data formatted according to the XML schema of Figure 5A is depicted that provides a data structure for the legacy computer output of Figure 4. The data falls within an opening tag of "<bill>" and a closing tag of "</bill>". The "bill" schema includes a "detail-list" subschema that, in turn, includes a "detail-by-phone" subschema. Within the "detail-by-phone" subschema separate tags are defined that report

the data from the TOTAL CALLS line of Figure 4. The "total-bill-by-phone" subschema, the "total-time-by-phone" subschema and the "total-calls" subschema define the data printed in the TOTAL CALLS line of the legacy computer system output.

Figure 5A depicts the XML bill schema used to output the data in Figure 5. The root element of the schema is the element type named "bill". Its subschemas are types of the subelements. The detail-by-phone subschema of the detail-list subschema of bill includes the data structure reported in the TOTAL CALLS line of Figure 4.

Referring now to Figure 6, one example of a display by the modeling/mapping graphical user interface illustrates the mapping relationship between the XML schema, the report data model and the underlying legacy computer program application depicted as COBOL code in Figure 6a. A grammar window 54 lists the report data model grammar rules provided by the report data model of the legacy program applications. An XML schema window 56 depicts the XML schema depicted by Figure 5 that is representative of the legacy computer system output depicted by Figure 4. A mapping window 58 depicts the relationship between the variables of the legacy program applications and the XML tags of the XML schema. For instance, RS-TIME is a COBOL variable that is mapped to the "total-time" tag of the XML schema. Rule 79 represents the root or beginning of the grammar provided by the report data model shown above. Within the grammar window, incident 47 falls under rule 78 as an incident called to report the total cost from the legacy program application.

Once a relationship is established between the report data model and the XML schema, a modification specification is written, and the generation of modified legacy program applications is automatically performed.

5 The modified legacy program applications are designed to report the data from the legacy computer system along with XML schema tags that describe the nature of the data. For instance, the following is incident 47 having XML tag information and data field type and value
10 information annotated within it:

```

    Incident 47 loc 414 record PRTEC from RS-LINE
      <LINE 2>
        0:  "  TOTAL CALLS:" size 14
        14: RECORDS-SELECTED-EDIT loc 266 pic Z,ZZ9 size 5
15          tag total-calls-by-phone
            id bill\detail-list\detail-by-phone\total-
              calls-by-phone
            type TAG when P
        19: "TOTAL TIME:" size 34
        20 53: RS-TIME loc 270 pic 99 size 2
            tag total-time-by-phone
            id bill\total-time
            type TAG when P
        55: ":"
        25 56: RS-MM loc 272 pic 99 size 2
        58: ":" size 1
        59: RS-SS loc 274 pic 99 size 2
        61: "" size 2
        63: RS-COST loc 276 pic $$$$$.99 size 8
        30      tag total-cost
            id bill\total-cost
            type TAG when P
        71: "" size 2

```

35 The annotated incidents provide the basis for the modification specification which is provided by mapping engine 26 to code generation engine 24 for the creation of modified legacy program applications. For instance, the modification specification for incident 47 is:

```

node(414, XML-TOTAL-CALLS-ID, 'total-calls-by-
    phone', 'RECORDS-SELECTED-EDIT', 266).
node(414, XML-TOTAL-TIME-ID, 'total-time-by-phone',
    'RS-TIME', 270).
5   node(414, XML-TOTAL-BILL-ID, 'total-bill-by-phone',
    'RS-COST', 276)

```

Note that the data items RS-HH, RS-MM, and RS-SS have been combined under data item RS-TIME.

10 Code generation engine 24 applies the modification specification to determine the modifications needed for the legacy code to output appropriate tags relating data to the XML schema. For instance, the following code is added by code generation engine 24 in accordance to the

15 modification specification in order to emit XML formatted data from the modified legacy program applications that relate to incident 47:

```

                MOVE RECORDS-SELECTED-EDIT      TO XML-BUFFER
                MOVE XML-TOTAL-CALLS-ID          TO XML-UID
20   CALL 'XML' USING      XML-UID
                                XML-BUFFER

                MOVE RS-TIME                     TO XML-BUFFER
                MOVE XML-TOTAL-TIME-ID           TO XML-UID
                CALL 'XML' USING      XML-UID
25   CALL 'XML' USING      XML-UID
                                XML-BUFFER

                MOVE RS-COST                     TO XML-BUFFER
                MOVE XML-TOTAL-BILL-ID           TO XML-UID
                CALL 'XML' USING      XML-UID
30   CALL 'XML' USING      XML-UID
                                XML-BUFFER

```

30 The modified legacy program application calls writer engine 20 to emit output with tags provided from the XML schema stored in context table 22. Once modified legacy program applications 18 are loaded onto legacy computer

35 system 12, writer engine 20 in cooperation with context table 22 is called by modified legacy program applications 18 to output an XML data stream.

The pre-computed data necessary to control the accurate writing of embedded XML elements is generated from the XML schema. The pre-computed data consists of a map from an index to depth, start-label, stop-label, parent-index, and other information necessary to generate correct XML. For instance, the XML schema depicted by Figure 7 provides a data structure for printing a customer's name, address and identification. Figure 7A depicts the tree structure of the XML schema shown by Figure 7. Figure 7B depicts the computed data structure of the XML schema shown by Figure 7, including the depth of each element corresponding to the element's position in the tree structure and an index for each element indicating its ancestor element. For instance, the "Customer" element is the root of the XML schema and has a descendant element of "Address". The "Street" element is a descendant of the "Address" element, as indicated by the number 3 corresponding to the identification of the "Address" element.

Referring now to Figure 8, a flow diagram depicts the process implemented in the write engine to output an XML data stream. The computed data depicted by Figure 7B is applied to the writing of the XML data stream with reference to the XML schema depicted by Figure 7. The process begins at step 100 where an XML print command is called along with identification of the schema element and the value to be printed. For instance, the commands:

```

      MOVE '861 East Meadow'          TO XML-BUFFER
      MOVE XML-CUSTOMER-STREET        TO XML-UID
30   CALL 'XML' USING      XML-UID
                                XML-BUFFER

```

provide the identification for the "Street" element of the computed data structure.

At step 102, a test is made to see if the XML printing process has been initiated to emit data. If not, the appropriate data structure or current context is initialized and the identified data file is opened at step 104. For example, an XML print instruction relating to customer data would result in initialization of the current context that has "Customer" as the root element.

At step 106, a test is performed to determine whether all data of the data structure has been emitted. If all data is emitted, the process proceeds to step 108 where the appropriate XML end tags are emitted and the data file is closed. If, however, the node ID is not at the end of the data structure, then the process proceeds to step 109. For instance, if the node ID is "City" then the process proceeds to step 109.

At step 109, a test is performed to determine whether the called node ID is a descendant of the current node. For instance, the "Street" element is a descendant of the "Address" element. Thus, if the "Address" element is the current element and the "Street" element is the called element, then the process proceeds to step 110. In contrast, if the current element is the "Name" element and the called element is the "Street" element, then the process proceeds to step 112 in order to locate the nearest mutual ancestor node ID having consistent cardinality with the called element. Thus, the mutual ancestor of the "Name" and "Street" elements, the "Customer" element, would be identified. At step 114 the end tags are closed up to the "Customer" element, and the

process proceeds to step 110. The cardinality check at step 112 ensures that, if an ancestor only permits a single occurrence of a descendant, then the descendant is only printed once. For example, if a descendant element
5 is emitted in successive occurrences, the cardinality indicates that, between each emission of the descendant, the ancestor element is closed and a new instance of the ancestor is opened.

At step 110, tags are opened from the identified
10 ancestor down through the called node, and attributes of the nodes along the tree structure are emitted along with appropriate values. At step 116 the process returns to step 100 to accept the next value in the XML data stream.

An additional function of writer engine 20 is the
15 delayed processing for writing of data as complete data structures. For instance, writer engine 20 stores attributes, values and text values to a data structure without emitting the data until the all of the attributes, values and text values of the data structure
20 are complete. This delayed processing allows the writer engine 20 to adhere to the sequencing requirements of the XML schema.

The sample output below illustrates the need for this capability.

25

SAMPLE OUTPUT

	Send check payable to
John Doe	ABC WIRELESS
111 Mizar Pl	P. O. BOX 666666
30 Pasadena CA 93436-1204	DALLAS TX 75263-1111

Two addresses are printed side by side on the page. One is the customer address and the other is the remitter

address. Thus, a single line of output contains interleaved elements from two distinct subschemas, according to the target XML schema shown below.

5 TARGET XML SCHEMA

```

    <ElementType name="name"/>
    <ElementType name="address"/>
    <ElementType name="phone-number"/>
10  <ElementType name="city-state-zip"/>
    <ElementType name="customer">
        <element type="name"/>
        <element type="address"/>
        <element type="city-state-zip"/>
15  </ElementType>
    <ElementType name="remitter">
        <element type="name"/>
        <element type="address"/>
        <element type="city-state-zip"/>
20  </ElementType>
    <ElementType name="bill-header">
        <element type="customer"/>
        <element type="remitter"/>
    </ElementType>
25

```

A complete customer address subschema must be emitted before the remitter address subschema. Due to the structure of the legacy code (shown below) it is necessary to buffer up the remitter address components while writing the XML structure for the customer. In addition to its other bookkeeping roles, the context table provides storage for this buffering operation.

The original legacy code can be seen below:

FRAGMENT OF LEGACY COBOL DATA DECLARATIONS

```

05 HL-BILL-HEADER-10.
    10 FILLER      PIC X(49) VALUE SPACES.
    10 FILLER      PIC X(32) VALUE "Send check payable to".
5   05 HL-BILL-HEADER-11.
    10 FILLER                                PIC X      VALUE SPACES.
    10 HLS-CUSTOMER-NAME                      PIC X(40) VALUE SPACES.
    10 HLS-REMITTANCE-NAME                    PIC X(40) VALUE SPACES.
10  05 HL-BILL-HEADER-12.
    10 FILLER                                PIC X      VALUE SPACES.
    10 HLS-CUSTOMER-ADDRESS                    PIC X(40) VALUE SPACES.
    10 HLS-REMITTANCE-ADDRESS                  PIC X(40) VALUE SPACES.
    05 HL-BILL-HEADER-13.
    10 FILLER                                PIC X      VALUE SPACES.
15  10 HLS-CT-ST-ZIP                          PIC X(40) VALUE SPACES.
    10 HLS-REMITTANCE-CT-ST-ZIP                PIC X(40) VALUE SPACES.

```

FRAGMENT OF LEGACY COBOL PROCEDURAL CODE

```

20  WRITE BILL-RECORD FROM HL-BILL-HEADER-10 AFTER 2
    WRITE BILL-RECORD FROM HL-BILL-HEADER-11
    WRITE BILL-RECORD FROM HL-BILL-HEADER-12
    WRITE BILL-RECORD FROM HL-BILL-HEADER-13

```

25 The modified code is shown below, with comments
describing the successive operations.

MODIFIED LEGACY COBOL PROCEDURAL CODE

```

* Unchanged, since it does not emit anything
* relevant to the schema
  WRITE BILL-RECORD FROM HL-BILL-HEADER-10 AFTER  2
5  * Emit the customer name
    MOVE HLS-CUSTOMER-NAME TO XML-VALUE
    MOVE CUSTOMER-NAME-ID TO XML-TAG
    CALL "XML" USING XML-TAG XML-VALUE
* Deferred write of remitter name
10  MOVE HLS-REMITTANCE-NAME TO XML-VALUE
    MOVE REMITTER-NAME-ID TO XML-TAG
    CALL "XML-SET-NODE-VALUE" USING XML-TAG XML-VALUE
    WRITE BILL-RECORD FROM HL-BILL-HEADER-11
* Emit the customer address
15  MOVE HLS-CUSTOMER-ADDRESS TO XML-VALUE
    MOVE CUSTOMER-ADDRESS-ID TO XML-TAG
    CALL "XML" USING XML-TAG XML-VALUE
* Deferred write of remitter address
    MOVE HLS-REMITTANCE-ADDRESS TO XML-VALUE
20  MOVE REMITTER-ADDRESS-ID TO XML-TAG
    CALL "XML-SET-NODE-VALUE" USING XML-TAG XML-VALUE
    WRITE BILL-RECORD FROM HL-BILL-HEADER-12
* Emit customer city-state-zip
    MOVE HLS-CT-ST-ZIP TO XML-VALUE
25  MOVE CUSTOMER-CITY-STATE-ZIP-ID TO XML-TAG
    CALL "XML" XML-TAG XML-VALUE
* Deferred write of remitter city-state-zip
    MOVE HLS-REMITTANCE-CT-ST-ZIP TO XML-VALUE
    MOVE REMITTER-CITY-STATE-ZIP-ID TO XML-TAG
30  CALL "XML-SET-NODE-VALUE" USING XML-TAG XML-VALUE
    WRITE BILL-RECORD FROM HL-BILL-HEADER-13
* Write of deferred remitter node with subnodes.
    MOVE XML-REMITTER-ID TO XML-TAG
    CALL "XML-WRITE-NODE" USING XML-TAG
35

```

The resulting output for this particular example can be seen below.

XML OUTPUT

```

<bill-header>
  <customer>
    <name>John Doe</name>
5    <address>111 Mizar Pl</address>
    <city-state-zip> Pasadena CA 93436-1204</city-state-
zip>
  </customer>
  <remitter>
10   <name>ABC WIRELESS</name>
    <address> P. O. BOX 666666</address>
    <city-state-zip>DALLAS TX 75263-1111</city-state-zip>
  </remitter>
15 </bill-header>

```

An XML schema may impose cardinality constraints on the component elements. For example, in the schema below C, C1 and C2 may each appear only once within their respective parents. It is important to ensure this property when producing an instance of this schema.

```

<ElementType name="C1">
<ElementType name="C2">
<ElementType name="C">
25   <element type="C1" maxOccurs="1"/>
    <element type="C2" maxOccurs="1"/>
  </ElementType>
  <ElementType name="A">
    <element type="C" maxOccurs="1"/>
30 </ElementType>

```

Some of the precomputed elements of the context table that represent the schema rooted at "A" are shown in the table below.

35

	ID	Label	Depth	Parent	Cardinality
	1	<A>	1	0	n
	2	<C>	2	1	1
5	3	<C1>	3	2	1
	4	<C2>	3	2	1

The ID column holds the unique identifier associated with each element. The Cardinality column indicates a
 10 constraint on the number of occurrences of an element within its parent. 'n' means there may be zero or more. '1' indicates that there should be exactly 1.

The table below shows how this information is used dynamically as XML-PRINT commands are executed. (Note
 15 that the COUNT column of the CONTEXT shows the change in the value of the cardinality count with respect to a particular schema element.)

	CONTEXT				
	STATE	STACK	COUNT	COMMAND	OUTPUT
20	0	[]	A =1	XML-PRINT C1, V11	<A>
	1	[A]	C =1		<C>
25	2	[A,C]	C1=1		<C1>V11</C1>
	3	[A,C]	C2=1	XML-PRINT C2, V21	<C2>V21</C2>
	4	[A,C]	C1=0 C2=0	XML-PRINT C1, V12	</C>
30	5	[A]	C =0		
	6	[]	A =2		<A>
	7	[A]	C =1		<C>
35	8	[A,C]	C1=1		<C1>V12</C1>

The initial state, 0, includes an empty stack and no cardinality counts associated with any schema element. The command to print V11 as a schema element C1 causes a

check of the state, the output of the <A> and <C>
ancestor labels, and the output of the labeled V11
element. The STACK is modified to record the current
context of an open <A> and <C> and the cardinality counts
5 for A, C and C1 are set to 1.

The command to print V21 as a schema element C2
causes a check of the state. The STACK as regards the
ancestors of C2 is correct, so the only printing
operation is the output of the labeled V21 element. The
10 STACK is unchanged. The cardinality count for C2 is set
to 1.

The command to print V12 labeled by schema element
C1 causes a check of the state. The STACK in state 3 as
regards the ancestors of C1 is correct. However, the
15 cardinality count for C1 is equal to 1 which is the
permitted cardinality of elements of this type. We
therefore close C and reset the cardinality counts for
its children, C1 and C2. At this point it can be seen
that the cardinality count for C is equal to 1 which is
20 the permitted cardinality of elements of this type. We
therefore close A and reset the cardinality count for C
to 0. At this point (state 6) the stack is empty, and we
output the ancestor labels <A> and <C>, output the
labeled V12 element, modify the STACK to record the
25 current context of an open <A> and <C> and set the
cardinality counts for C and C1 to 1 and A to 2.

Now, consider the case where the maximum occurrence
of elements of type C has no upper bound. That is, the
element definition of C within A is changed to:
30

```
<element type="C" maxOccurs="n"/>
```

The third print step now becomes simpler, as shown in the table below:

		CONTEXT			
	STATE	STACK	COUNT	COMMAND	OUTPUT
5	0	[]	A =1	XML-PRINT C1, V11	<A>
	1	[A]	C =1		<C>
10	2	[A,C]	C1=1		<C1>V11</C1>
	3	[A,C]	C2=1	XML-PRINT C2, V22	<C2>V22</C2>
	4	[A,C]	C1=0 C2=0	XML-PRINT C1, V12	</C>
15	5	[A]	C =2		<C>
	6	[A,C]	C1=1		<C1>V12</C1>

The first two XML-PRINT operations proceed as before. Because there may be an arbitrary number of C subelements of A there is no need to close the A and open a new one. We close C, setting the STACK to [A], and reset the cardinality counts for C's descendents, C1 and C2. We open a new C and increment C's cardinality count to 2. Finally the labeled V12 element is output, and the cardinality count for C1 is set to 1.

Finally, contrast the previous examples to the case where there is no upper bound on the occurrence of any element. That is, the element definitions of C, C1 and C2 are changed to:

```
<element type="C1" maxOccurs="n"/>
<element type="C2" maxOccurs="n"/>
<element type="C" maxOccurs="n"/>
```

35

The state changes as seen in the table below:

CONTEXT					
5	STATE	STACK	COUNT	COMMAND	OUTPUT
	1	[]	A =1	XML-PRINT C1, V11	<A>
	2	[A]	C =1		<C>
	3	[A, C]	C1=1		<C1>V11</C1>
10	4	[A, C]	C2=1	XML-PRINT C2, V22	<C2>V22</C2>
	5	[A, C]	C1=2	XML-PRINT C1, V12	<C1>V12</C1>

15 The first and second calls work as before. The
 third call becomes even simpler. Because there may be an
 arbitrary number of C1 subelements of C there is no need
 to close the C and open a new one. The labeled V12
 element is output, and the cardinality count for C1 is
 20 incremented to 2.

When modifying legacy code certain difficulties
 arise in deciding when to print schema data that is
 contained in headers and footers. Consider the example
 of telephone invoices. The output of an invoicing
 25 program may consist of a sequence of invoices. Each
 invoice may take up a single page or multiple pages.
 When the invoice occupies multiple pages, its header is
 typically repeated. As a result, sometimes the header is
 introducing a new invoice schema element, and at other
 30 times it is mere page decoration of the human readable
 output. In order to recognize the need to close the
 current invoice tag and open a new one, it is necessary
 to know that there is some unique identifier associated
 with each invoice instance and that when the value of
 35 this 'key' changes, the current invoice is closed and a

new one opened. To enable this computation the context table contains a boolean identifier for key elements and the current values for these elements. This check is performed at the same time as the cardinality check.

5 The present invention has a number of important business applications that relate to e-commerce and to more efficient use of legacy computer reports by brick-and-mortar businesses. One example is that internal reports otherwise printed on paper for manual inspection
10 are instead available for storage on a database in XML format. Once electronically stored, the reports are available as electronic information assets for review by a browser or other electronic analysis. The reports are also much simpler to store in a data warehouse.

15 Another commercial application is as Enterprise Application Integration (EAI) middleware for transfer of data between applications. Setting up transfer of data from structured databases, such as those using XML formats, is relatively straightforward since data
20 definitions may be treated as semantic tags. In contrast, typical legacy computer system reports are unstructured since they represent data generated according to business logic instead of a data structure. By modifying underlying legacy applications to directly
25 output XML formatted data, the outputted data is more easily treated as structured data files for integration in a suite of enterprise applications.

 Another commercial application is Electronic Bill Presentment and Payment (EBPP). In order to provide
30 electronic billing from typical legacy computer systems, a parser is generally used to parse untagged invoice data

files and then tag the data files with semantically meaningful identifiers. Parsers are expensive and difficult to set up and maintain. In contrast, modification of underlying legacy computer system code to directly output XML formatted data saves time, requires less expertise and expense, and provides data in a recognized format for e-commerce. Thus, businesses with legacy computer systems may output XML formatted reports that allow the business to take advantage of advances taking place in e-commerce, such as automatic bill payment. For instance, individual telephone customers could receive their telephone bill by e-mail containing a web link to a site that provides the individual's bill detail.

Another commercial application is archival of billing statements. Banks, for example, maintain large archives of customer billing statements as reduced photographic copies on microfiche or as print streams on optical disk systems. Retrieval systems for these archives are complex and difficult to maintain. Data extraction from the print streams is a recent improvement, as disclosed in U.S. Patent No. 6,031,625 (US6031625), but such a system still requires processing of print streams after they have been output from the legacy application. In contrast, modifying the underlying legacy computer code so it directly produces XML formatted billing statements makes archiving and retrieval of billing statements much simpler. For example, the XML statements can be stored in a relational database for easy retrieval. In addition, the retrieved statements, because they have an XML representation,

become directly viewable, for example, using browser technology.

Another commercial application is in business intelligence, which seeks to analyze electronic information assets to determine business behaviors, such as purchasing or selling behaviors. Syndicated data providers obtain data for intelligence analysis through reports that are parsed on a distributor or purchaser basis. This detailed parsing can be even more complicated than the parsing used to support EBPP function. Thus, direct generation of XML formatted data from a legacy computer system providing invoice reports is even more efficient in the business intelligence role than in electronic billing and other applications since detailed data analysis is available without applying detailed parsing systems.

Overall the direct generation of XML formatted data from a legacy computer system reduces friction in information networks by making the transfer of information simpler. This reduces the cost of tracking information, the manual effort to exchange and analyze business information, and reduces the time associated with obtaining valuable business intelligence from existing data sources. By making data available in semantically meaningful form, customers can automatically analyze their suppliers for Vendor Relationship Management, suppliers can automatically analyze their customers for Customer Relationship Management, and manufacturers can automatically analyze markets for their products for Market Intelligence.

Although the present invention has been described in detail, it should be understood that various changes, substitutions and alterations can be made hereto without departing from the spirit and scope of the invention as
5 defined by the appended claims.

WHAT IS CLAIMED IS:

1. A method for modeling a legacy computer system comprising:
 - identifying incidents of applications of the
 - 5 legacy computer system that output data; and
 - defining a control flow graph of the output incidents.
2. The method of Claim 1 further comprising:
 - 10 identifying the value or type of the data fields associated with each output incident; and
 - attaching the value or type to the control flow graph.
3. The method of Claim 2 wherein identifying the value or type further comprises:
 - 15 identifying output incidents of invariant data fields; and
 - attaching the value of each invariant data field to
 - 20 its associated control flow graph incident.
4. The method of Claim 2 wherein identifying the value or type further comprises:
 - identifying output incidents of variant data fields;
 - 25 and
 - attaching the type of each variant data field to its associated control flow graph incident.

5. The method of Claim 1 wherein the control flow graph comprises:

plural nodes having associated arcs, each node associated with an output incident.

5

6. The method of Claim 5 wherein a complete control flow graph of the application (N, A) is used to compute a directed graph (N_R, A_R) wherein:

10 n comprises a node in N_R if n , an element of N , starts an output process, stops an output process or outputs data; and

$\langle n_1, n_m \rangle$ comprises an arc in A_R if n_1 and n_m are in N_R and a sequence of arcs $\langle n_1, n_2 \rangle, \langle n_2, n_3 \rangle, \dots, \langle n_{m-1}, n_m \rangle$ is in A such that for i from 2 to $m-1$, n_i is not in N_R .

15

7. The method of Claim 6 further comprising:

defining the control flow graph as a formal grammar that describes the flow paths from each start command to the associated stop commands.

20

8. The method of Claim 1 further comprising:

associating the incidents with an Extensible Markup Language schema; and

25 creating a specification to modify the legacy computer system applications to provide output in Extensible Markup Language format.

9. The method of Claim 8 further comprising:

30 automatically modifying the legacy computer system applications in accordance with the specification.

10. A system for modeling an output application of a legacy computer system comprising:

a modeling engine interfaced with the legacy computer system, the modeling engine operable to analyze
5 an application loaded on the legacy computer system to identify incidents within the application that output data from the legacy computer system; and

a control flow graph of the output operations within the applications.

10

11. The system of Claim 10 wherein the control flow graph comprises plural nodes, each node associated with an output incident.

15

12. The system of Claim 11 wherein a complete control flow graph of the application (N, A) is used to compute a directed graph (N_R, A_R) wherein:

n comprises a node in N_R if n , an element of N , starts an output process, stops an output process or
20 outputs data; and

$\langle n_1, n_m \rangle$ comprises an arc in A_R if n_1 and n_m are in N_R and a sequence of arcs $\langle n_1, n_2 \rangle, \langle n_2, n_3 \rangle, \dots, \langle n_{m-1}, n_m \rangle$ is in A such that for i from 2 to $m-1$, n_i is not in N_R .

25

13. The system of claim 10 wherein the control flow graph of the output operations comprises as a formal grammar that describes the flow paths from each start command to the associated stop commands.

14. The system of Claim 10 further comprising a graphical user interface in communication with the modeling engine, the graphical user interface operable to display the control flow graph formal grammar and the incidents.

15. The system of Claim 14 wherein the graphical user interface further communicates with a mapping engine and an Extensible Markup Language schema, the mapping engine operable to map the incidents of the applications with the control flow graph formal grammar and the Extensible Markup Language schema.

METHOD AND SYSTEM FOR MODELING A LEGACY COMPUTER SYSTEM

ABSTRACT OF THE DISCLOSURE

A method and system for modifying program applications of a legacy computer system to directly output data in XML format models the legacy computer system, maps the model to an XML schema and automatically modifies one or more applications to directly output XML formatted data in cooperation with a writer engine and a context table. A modeling engine lists the incidents within the applications that write data and generates a report data model. The report data model includes statically determined value or type of the data fields and is written in a formal grammar that describes how the write operations are combined. A modification specification is created to define modifications to the legacy computer system applications that relate applications that write data to the XML schema. A code generation engine then applies the modification specification to the applications to write modified applications that, in cooperation with a writer engine and context table, directly output XML formatted data from the legacy computer system without a need for transforming the data.

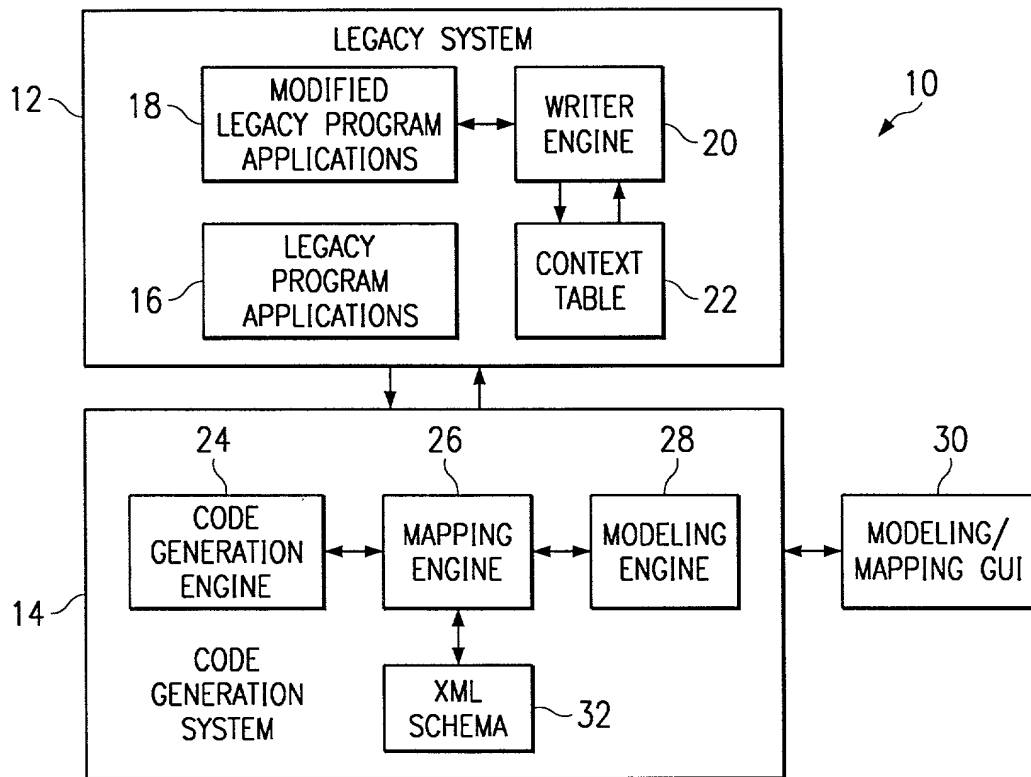


FIG. 1

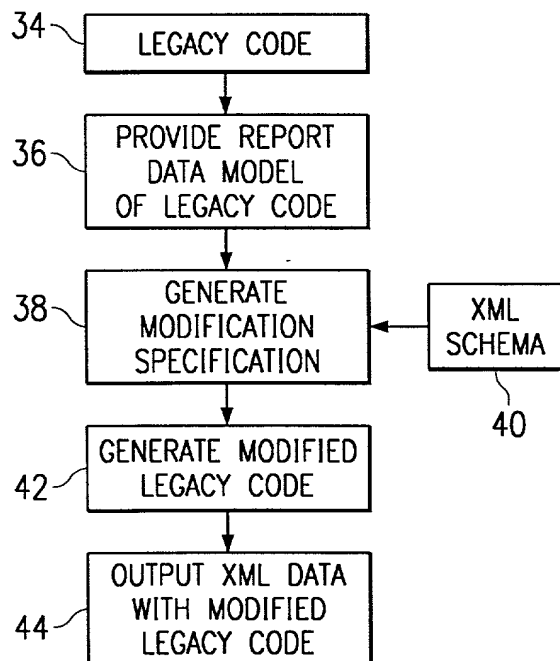


FIG. 2

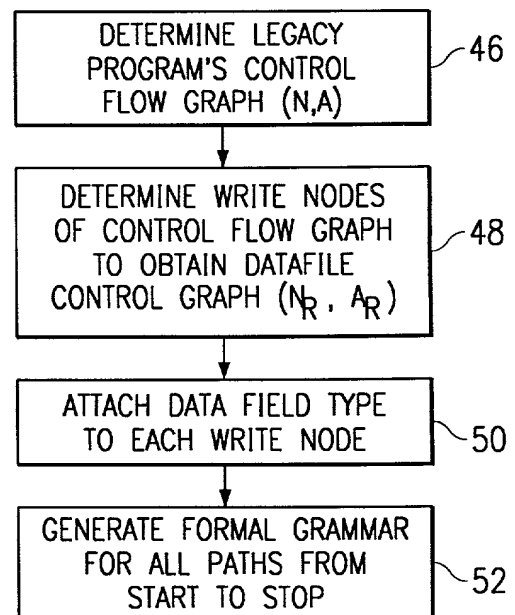


FIG. 3

Date 01/25/2000

American Telephone Company

Monthly Statement for Account Number: 1111111111
 COMPANY: EDS

PHONE NUMBER: (214) 999-1212

PERSON: Suzie Q

Sample-Data

Date	Time	Rate	Number	City and State	Duration	Cost
12/01/1999	07:15A	B	210-404-6690	San Antoni TX	00:12.2	\$1.22
12/02/1999	01:00A	A	210-404-6690	San Antoni TX	00:01.0	\$0.05
12/02/1999	17:45P	D	919-416-1212	Kill Devil NC	00:00.3	\$0.06
12/03/1999	15:01P	C	210-404-6690	San Antoni TX	00:02.0	\$0.30
12/03/1999	20:23P	D	919-462-1212	Kill Devil NC	03:02.3	\$36.46
12/04/1999	06:06A	B	615-655-1122	Nashville TN	00:00.5	\$0.05
12/07/1999	04:00A	A	210-404-6690	San Antoni TX	01:00.0	\$3.00
12/07/1999	15:05P	C	615-655-1122	Nashville TN	00:40.5	\$6.07
12/07/1999	15:45P	C	205-555-1234	Dothan AL	00:04.3	\$0.64
12/11/1999	02:13A	A	615-655-1122	Nashville TN	00:30.0	\$1.50
12/11/1999	08:08A	B	210-404-6690	San Antoni TX	02:20.5	\$14.05
12/13/1999	08:00A	B	210-404-6690	San Antoni TX	01:50.0	\$11.00
12/21/1999	00:26A	A	210-404-6690	San Antoni TX	00:31.3	\$1.56
12/21/1999	04:12A	A	919-416-1212	Kill Devil NC	00:32.0	\$1.60
12/21/1999	18:23P	D	615-655-1122	Nashville TN	00:23.3	\$4.67
12/21/1999	19:01P	D	210-404-6690	San Antoni TX	03:02.4	\$36.48
12/22/1999	08:04A	B	205-555-1234	Dothan AL	00:43.2	\$4.32
12/27/1999	12:01A	C	205-555-1234	Dothan AL	00:13.6	\$2.04
12/27/1999	21:12P	D	205-555-1234	Dothan AL	01:03.0	\$12.60
TOTAL CALLS: 19				TOTAL TIME: 16:12:49		\$137.67

FIG. 4


```

<bill>
  <account>111111111</account>
  <customer-name>EDS</customer-name>
  <calling-date>1/billing-date26/2000</>
  <total-bill-by-phone>69.66</total-bill-by-phone>
  <total-time-by-phone>515.6</total-time-by-phone>
  <total-calls>34</total-calls>
  <detail-list>
    <detail-by-phone>
      <phone-number>999-1212</phone-number>
      <area-code>214</area-code>
      <phone-user>Suzie Q Sample-Data</phone-user>
      <calls-by-phone>
        <call>
          <date>12-01-1999</date>
          <time>07.15A</time>
          <code>B</code>
          <phone-number>404-6690</phone-number>
          <area-code>210</area-code>
          <called-city>San Antonio</called-city>
          <called-state>TX</called-state>
          <duration>12.2</duration>
          <charge>1.22</charge>
        </call>
        <call>
          <date>12-01-1999</date>
          <time>01.00A</time>
          <code>A</code>
          <phone-number>404-6690</phone-number>
          <area-code>210</area-code>
          <called-city>San Antonio</called-city>
          <called-state>TX</called-state>
          <duration>01.0</duration>
          <charge>0.05</charge>
        </call>
        <call>
          <date>12-01-1999</date>
          <time>17.45P</time>
          <code>D</code>
          <phone-number>416-1212</phone-number>
          <area-code>919</area-code>
          <called-city>Kill Devil</called-city>
          <called-state>NC</called-state>
          <duration>0.3</duration>
          <charge>0.06</charge>
        </call>
      </calls-by-phone>
    </detail-by-phone>
  </detail-list>
</bill>

```

FIG. 5

```

<Schema xmlns="urn: schemas-microsoft-com:xml-data"
  xmlns:dt="urn:schemas-microsoft-com:datatypes">
  <ElementType name="accountno" content="textonly"/>
  <ElementType name="customer-name" content="textonly"/>
  <ElementType name="billing-date" content="textonly"/>
  <ElementType name="total-cost" content="textonly"/>
  <ElementType name="total-number-calls" content="textonly"/>
  <ElementType name="total-time" content="textonly"/>
  <ElementType name="phone-number" content="textonly"/>
  <ElementType name="phone-user" content="textonly"/>
  <ElementType name="date" content="textonly"/>
  <ElementType name="charge" content="textonly"/>
  <ElementType name="called-city" content="textonly"/>
  <ElementType name="called-state" content="textonly"/>
  <ElementType name="duration" content="textonly"/>
  <ElementType name="code" content="textonly"/>
  <ElementType name="area-code" content="textonly"/>
  <ElementType name="time" content="textonly"/>
  <ElementType name="call">
    <element type="area-code" maxOccurs="1" />
    <element type="phone-number" maxOccurs="1" />
    <element type="code" maxOccurs="1" />
    <element type="date" maxOccurs="1" />
    <element type="time" maxOccurs="1" />
    <element type="duration" maxOccurs="1" />
    <element type="charge" maxOccurs="1" />
    <element type="called-city" maxOccurs="1" />
    <element type="called-state" maxOccurs="1" />
  </ElementType>
  <ElementType name="total-bill-by-phone" content="textonly"/>
  <ElementType name="total-time-by-phone" content="textonly"/>
  <ElementType name="total-calls-by-phone" content="textonly"/>
  <ElementType name="calls-by-phone">
    <ElementType name="call"/>
  </ElementType>
  <ElementType name="detail-by-phone">
    <element type="phone-number"/>
    <element type="area-code"/>
    <element type="phone-user"/>
    <element type="total-bill-by-phone"/>
    <element type="total-time-by-phone"/>
    <element type="total-calls-by-phone"/>
    <element type="calls-by-phone"/>
  </ElementType>
  <ElementType name="detail-list">
    <element type="detail-by-phone"/>
  </ElementType>
  <ElementType name="bill">
    <element type="accountno"/>
    <element type="customer-name"/>
    <element type="billing-date"/>
    <element type="total-cost"/>
    <element type="total-number-calls"/>
    <element type="total-time"/>
    <element type="detail-list"/>
  </ElementType>
</Schema>

```

FIG. 5A

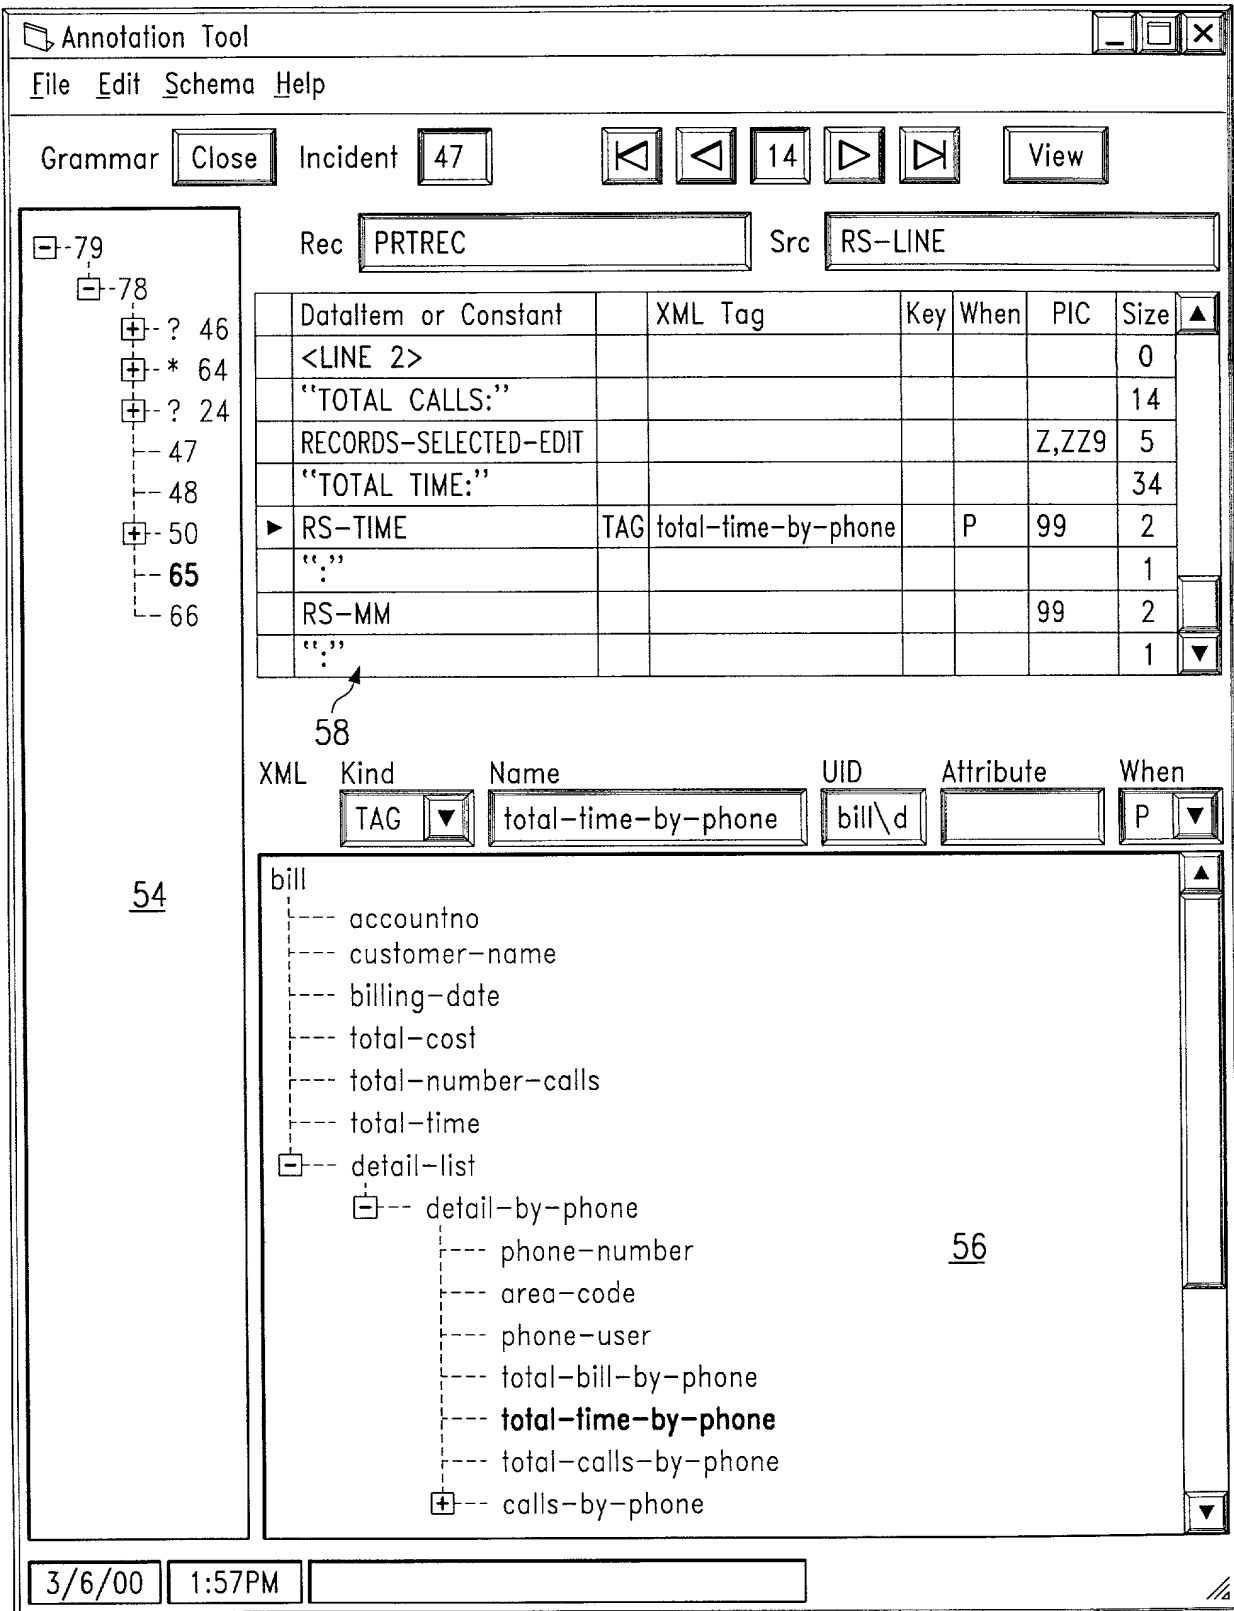


FIG. 6

```

56900 *
57000 /*****
57100 *                      SORT                      *
57200 *****/
57300 *BUILD-SORT-TEMP-FILE.
57400 * BUILD TEMPFILE HERE.
57500 *
57600 /*****
57700 *                      TERMINATION                      *
57800 *****/
57900 TERMINATION.
58000     PERFORM PRINT-A-CONTROL-BREAK-2.                      94188JHA
58100     MOVE RECORDS-SELECTED-TOTAL TO RECORDS-SELECTED-EDIT. 94190JHA
58200     ADD 1                      TO PAGE-COUNT.
58300     MOVE PAGE-COUNT           TO REPORT-PAGE-NO.
58400     WRITE PRTREC FROM R1-TITLE AFTER ADVANCING PAGE.      00003JHA
58500     MOVE "GRAND TOTAL:"      TO RS-MSG.
58600     MOVE GT-DURATION         TO HOLD-DURATION.
58700     PERFORM ACCUM-DURATION.
58800     MOVE WS-HH               TO RS-HH
58900     MOVE WS-MM               TO RS-MM.
59000     MOVE WS-SS               TO RS-SS.
59100     MOVE GT-COST              TO RS-COST.
59200     WRITE PRTREC FROM RS-LINE AFTER ADVANCING 5 LINES.
59300     CLOSE TEMPFILE.
59400     CLOSE PRINT.
59500 *
59600 /*****94190JHA
59700 *                      DURATION COMPUTATION AREA          *94190JHA

```

FIG. 6A

```

<Schema xmlns="urn:schemas-microsoft-com:xml-data"
  xmlns:dt="urn:schemas-microsoft-com:datatypes">
  <AttributeType name="Current" content="boolean"/>
  <ElementType name="Name" content="textonly"/>
  <ElementType name="ID" content="textonly"/>
  <ElementType name="Street" content="textonly"/>
  <ElementType name="City" content="textonly"/>
  <ElementType name="State" content="textonly"/>
  <ElementType name="ZIP" content="textonly"/>
  <ElementType name="Address">
    <Attribute type="Current"/>
    <Element type="Street"/>
    <Element type="City"/>
    <Element type="State"/>
    <Element type="ZIP"/>
  </ElementType>
  <ElementType name="Customer">
    <Element type="Name"/>
    <Element type="Address"/>
    <Element type="ID"/>
  </ElementType>
</Schema>

```

FIG. 7

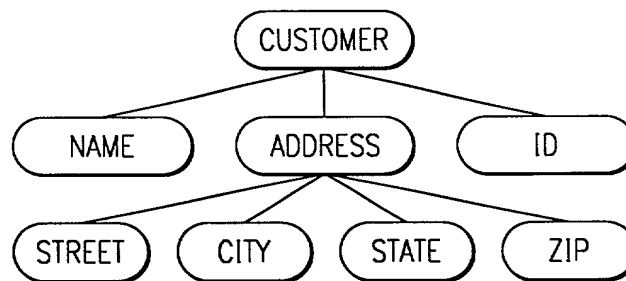


FIG. 7A

ID	LABEL	END LABEL	DEPTH	PARENT	CARDINALITY
1	<Customer>	</Customer>	1	0	n
2	<Name>	</Name>	2	1	1
3	<Address>	</Address>	2	1	1
4	<ID>	</ID>	2	1	1
5	<Street>	</Street>	3	3	1
6	<City>	</City>	3	3	1
7	<State>	</State>	3	3	1
8	<ZIP>	</ZIP>	3	3	1

FIG. 7B

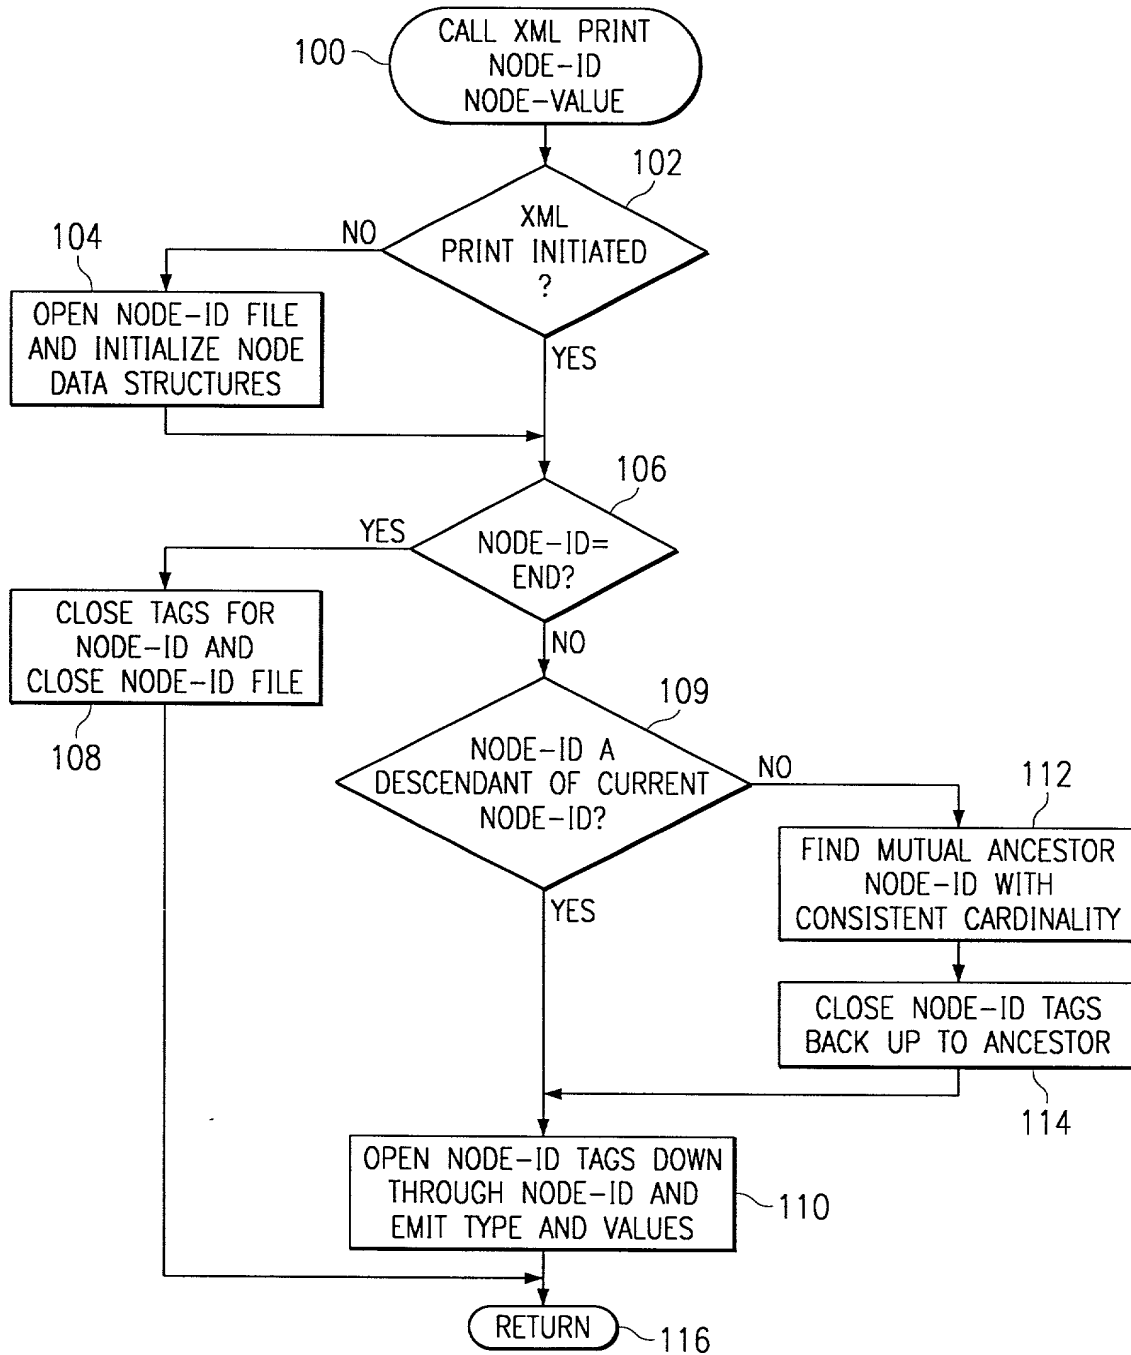


FIG. 8

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention or design entitled METHOD AND SYSTEM FOR MODELING A LEGACY COMPUTER SYSTEM the specification of which is attached hereto; that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Priority Claimed (Yes) (No)</u>
---------------	----------------	-----------------------	--

-----NONE-----

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>Application</u> <u>Serial Number</u>	<u>Date Filed</u>	<u>Status</u>
-----NONE-----		

I hereby appoint:

L. Joy Griebenow

Reg. No. 33,704

of Electronic Data Systems Corporation, and the following

Jerry W. Mills	Reg. No. 23,005
Robert M. Chiaviello, Jr.	Reg. No. 32,461
Ann C. Livingston	Reg. No. 32,479
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Wei Wei Jeang	Reg. No. 33,305
Kevin J. Meek	Reg. No. 33,738
T. Murray Smith	Reg. No. 30,222
Barton E. Showalter	Reg. No. 38,302
David G. Wille	Reg. No. 38,363
Bradley P. Williams	Reg. No. 40,227
Terry J. Stalford	Reg. No. 39,522
Christopher W. Kennerly	Reg. No. 40,675
Harold E. Meier	Reg. No. 22,428
Douglas M. Kubehl	Reg. No. 41,915
Samir A. Bhavsar	Reg. No. 41,617
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946
Roger J. Fulghum	Reg. No. 39,678
Rodger L. Tate	Reg. No. 27,399
Scott F. Partridge	Reg. No. 28,142
James B. Arpin	Reg. No. 33,470
James Remenick	Reg. No. 36,902
Jay B. Johnson	Reg. No. 38,193
Robert W. Holland	Reg. No. 40,020
Floyd B. Chapman	Reg. No. 40,555
Robert A. King	Reg. No. 42,738
James L. Baudino	Reg. No. 43,486
Scott T. Morris	Reg. No. 43,818
Tara D. Knapp	Reg. No. 43,723
William R. Borchers	Reg. No. 44,549
Robin A. Brooks	Reg. No. 44,563
Darren W. Collins	Reg. No. 44,625

Brian W. Oaks	Reg. No. 44,981
Luke K. Pedersen	Reg. No. 45,003
Matthew B. Talpis	Reg. No. 45,152
David M. Doyle	Reg. No. 43,596
Keiko Ichiye	Reg. No. P45,460
Russell W. White	Reg. No. P45,691
Patent Agents:	
Brian A. Dietzel	Reg. No. 44,656
Kevin R. Imes	Reg. No. 44,795

all of the firm of Baker Botts L.L.P., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities.

Send Correspondence To:

L. Joy Griebenow, Esq.
Electronic Data Systems
Corporation
5400 Legacy Drive, H3-3A-05
Plano, Texas 75024

Direct Telephone Calls To:

L. Joy Griebenow, Esq.
at (972) 605-5567
Attorney Docket No. 50-00-002

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Alando M. Ballantyne

John M. Bay

2/9/2000

Austin, Travis County, Texas

United States of America

212 Bonnieview
Austin, Texas 78704

Michael K. Smith

5-215

3/9/2000

Austin, Travis County, Texas

United States of America

8324 La Plata Loop
Austin, Texas 78737

Larry M. Hines

Long M. A. /

3/9/2000

Austin, Travis County, Texas

United States of America

4613 Chiappero Trail
Austin, Texas 78731